

# SALIDA SANITARY DISTRICT



## ADDENDUM NO. 1

To The

### GRIT REMOVAL AND REPLACEMENT OF AERATION DIFFUSERS AND PIPING IN BASIN NO. 3

June 22, 2020

The enclosed clarifications, changes, additions, and deletions are hereby incorporated into the Contract documents for construction of the above-referenced project.

**Acknowledge receipt of this Addendum in the space provided below, and submit this page with the bid. Failure to submit this acknowledge with the bid shall result in the bid being rejected as nonresponsive.**

#### Acknowledgement

\_\_\_\_\_  
Signature of Bidder

\_\_\_\_\_  
Print Name of Bidder

\_\_\_\_\_  
Name of Contractor


\_\_\_\_\_  
Date

ADDENDUM NO. 1  
to the Contract documents for the Grit Removal and Replacement of Aeration Diffusers and  
Piping in Basin No. 3

June 22, 2020

1. Project Specifications, Paragraph 01010-6.0, **Work Sequence and Constraints**.  
Add the following: "Installation of Steel Piping in Sludge Holding Tank No. 2 shall be completed by August 7, 2020. After August 7, 2020, Sludge Holding Tank No. 2 will be placed back into operation and Contractor will not after access to tank until after August 31, 2020".
2. Project Specifications, Paragraph 01025-2.3.2, **Bid Item 2**.  
Add the following: "The depth of sludge varies throughout the basin floor. It is estimated that the maximum depth of sludge is approximately 9-inches from the bottom of the basin floor".
3. Project Specifications, Paragraph 01025-2.3.5, **Bid Item 5**.  
Add the following: "Due to operational constraints, installation of the 5-foot section of flanged steel pipe in Sludge Holding Tank No. 2 shall be completed by August 7, 2020".
4. Project Specifications, Paragraph 01025-2.3.5, **Bid Item 5**.  
If Contactor cannot reuse the anchors found in Sludge Holding Tank No. 2, District will provide the anchors.
5. Project Specifications, Paragraph 01040-5.0, **Sequencing of the Work**.  
Add the following: "Installation of Steel Piping in Sludge Holding Tank No. 2 shall be completed by August 7, 2020".
6. **Pre-Bid Conference**. The attached exhibits were distributed during the June 16, 2020 Pre-Bid Conference to give Bidders an estimation of the depth of sludge that might be found in Basin No. 3. The exhibits show depths of sludge from a similar project for ICEAs Basin No. 1, completed in 2019.

**PRE-BID CONFERENCE EXHIBITS  
OF ICEAS BASIN No. 1**

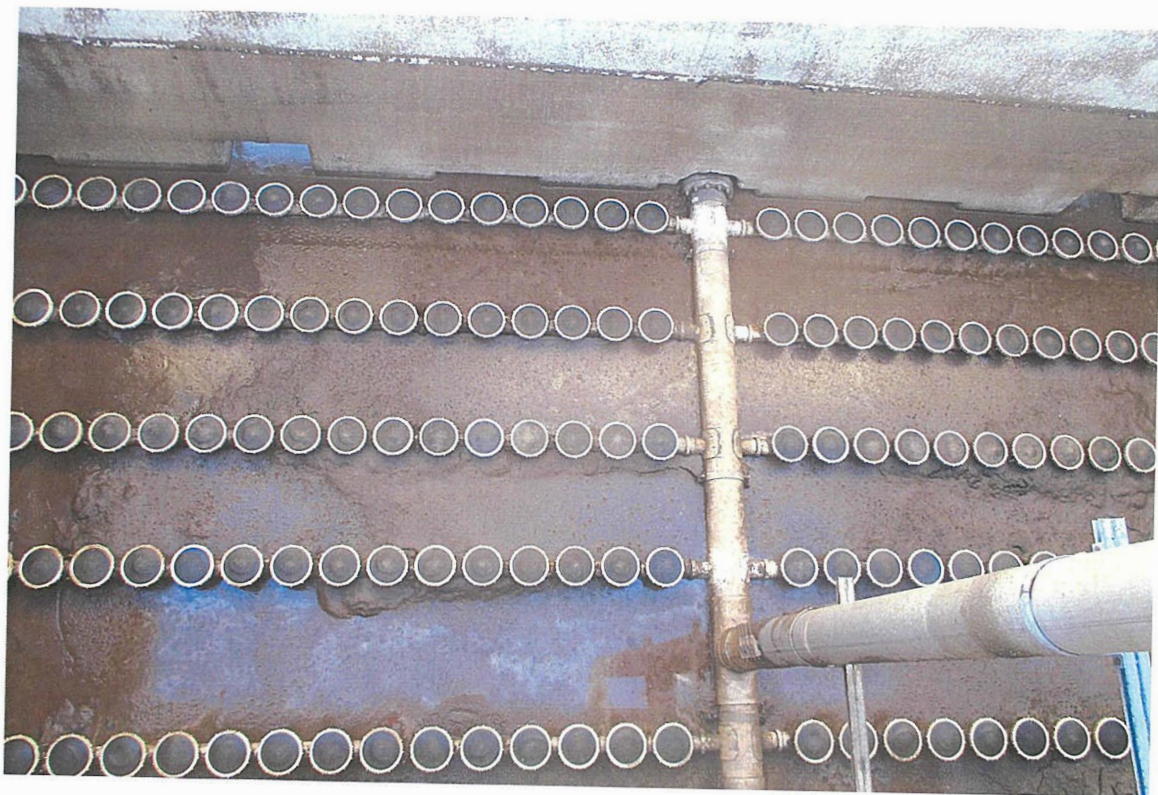
















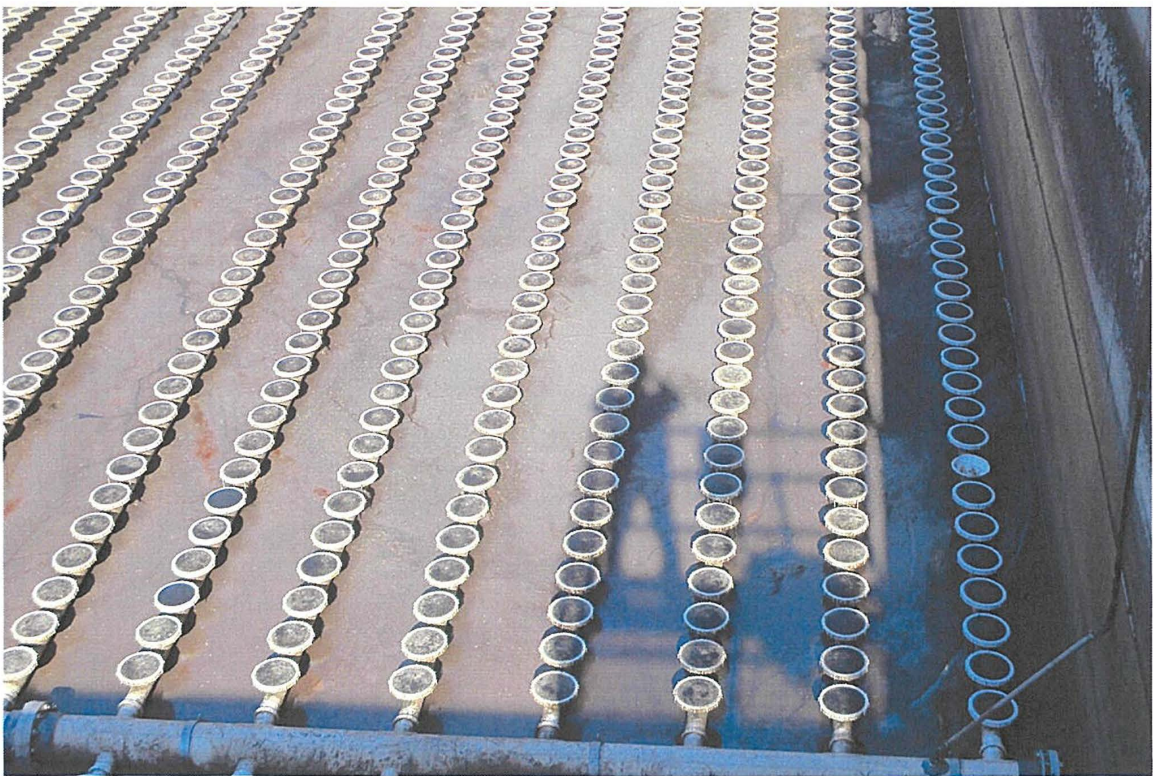









**\*\*END OF ADDENDUM\*\***